

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 November 2002 (14.11.2002)


PCT

(10) International Publication Number
WO 02/091495 A2


- (51) International Patent Classification⁷: H01L 51/20 (74) Agent: YAMPOLSKY, Alexander, V.; McDermott, Will & Emery, 600 13th Street, N.W., Washington, DC 20005-3096 (US).
- (21) International Application Number: PCT/US02/14269
- (22) International Filing Date: 7 May 2002 (07.05.2002) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/289,056 7 May 2001 (07.05.2001) US
- (71) Applicant: COATUE CORPORATION [US/US]; 25 Olympia Avenue, Suite B, Woburn, MA 01801 (US).
- (72) Inventors: BULOVIC, Vladimir; MIT, 77 Massachusetts Avenue, Room 13-3138, Cambridge, MA 02139 (US). MANDELL, Aaron; 140 Marlborough Street, Apt. 3, Boston, MA 02116 (US). PERLMAN, Andrew; 310 Marlborough Street, Boston, MA 02116 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MOLECULAR MEMORY DEVICE

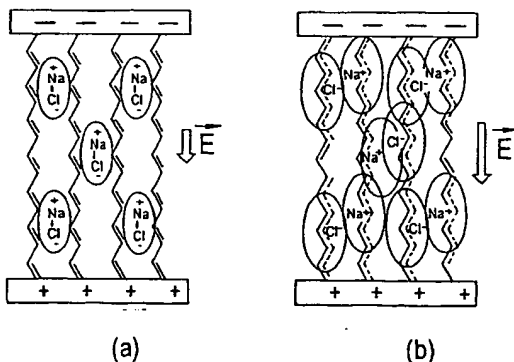

(57) Abstract: A novel memory cell is provided with an active region including a molecular system and ionic complexes distributed in the molecular system. A pair of write electrodes are arranged for writing information to the memory cell. The active region is responsive to an electric field applied between the pair of write electrodes for switching between an on state and an off state. The active region has a high impedance in the off and a low impedance in the on state. A pair of read electrodes is used to detect whether the active region is in the on state or in the off state to read the information from the memory cell. Read electrodes may be made of different materials having different work functions to reduce leakage current.

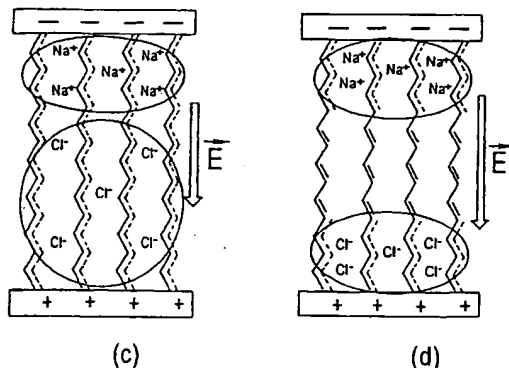

WO 02/091495 A2

BEST AVAILABLE COPY



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

MOLECULAR MEMORY DEVICE

Related Applications

This application contains subject matter related to the subject matter disclosed in copending U.S. Provisional Patent Application Serial No. 60/289,056, filed on May 7, 2001, entitled "Electrically Addressable Memory Switch With Built-In Leakage Current Barrier".

Field of the Invention

The invention relates to a memory device, and more particularly to a memory device including a molecular system with ionic complexes distributed in the system.

10 Background of the Invention

Various types of electrically addressable memory devices for computer data storage are known in the art. Most of these devices store a data bit as a charge in a capacitor. The charge state can be read out and the output signal used to control processes in a computer processor. Most of these devices require complex silicon processing steps and a dedicated device architecture which depends on memory type.

Memory devices are distinguished by their speed and data retention characteristic. Dynamic random access memory (DRAM) is a volatile memory characterized by a destructive read. This means that it is necessary to supply voltage to the memory bits at all times, or the information will disappear. Furthermore, each memory element has associated with it a transistor. Static random access memory (SRAM) stores data in a bistable flip-flop, commonly consisting of cross-coupled inverters. It is called "static" because it will retain a

value as long as power is supplied. It is still volatile, i.e. it will lose its contents when the power is switched off, in contrast to ROM. SRAM is usually faster than DRAM, but each bit requires several transistors (about six), so that a lesser number of bits of SRAM fit in the same area as compared to DRAM.

5 Erasable programmable read only memory (EPROM) is a type of storage device in which the data is determined by electrical charge stored in an isolated ("floating") MOS transistor gate. The isolation is good enough to retain the charge almost indefinitely (more than ten years) without an external power supply. The EPROM is programmed by "injecting" charge into the floating gate, using a
10 technique based on the tunnel effect. This requires higher voltage than in normal operation (usually 12V - 25V). The floating gate can be discharged through UV-illumination or electrically (EEPROM). Usually bytes or words can be erased and reprogrammed individually during system operation. EEPROM is more expensive and less dense than RAM. It is appropriate for storing small amounts of data
15 which is changed infrequently. Another known non-volatile memory device is a ferromagnetic RAM (Fe-RAM), wherein the individual storage cells do not require a dedicated transistor.

When using passive memory devices connected in parallel, e.g., in form of an array, leakage current problems can occur. Leakage problems can be reduced,
20 for example, by forming a Schottky barrier between an organometallic charge-transfer complex, such as M(TCNQ) and the underlying electrode. Alternatively, it has been proposed to provide a rectifying diode in series with the switching resistance at each intersection point of a memory array. This requires additional layers and processing steps.

25 The molecular composite material can have stable and metastable states that affect the retention time of the device. The device has an electrically insulating off state and at least one electrically conducting on state. The device can be switched reproducibly between the on state(s) and the off state by applying

an electrical field across the device with a predetermined polarity and magnitude for a predetermined time.

It would therefore be desirable to provide a device that has a built-in barrier that reduces leakage currents.

5 Summary of the Invention

The present invention provides a novel memory cell comprising an active region including a molecular system. Ionic complexes may be distributed in the molecular system. At least one write electrode applies an electric field to the active region to write information to the active region, and at least one read
10 electrode is provided for reading the information from the active region.

In accordance with an aspect of the invention, the memory cell may includes a pair of write electrodes for writing information to the memory cell, and the active region responsive to an electric field applied between the first and second write electrodes for switching between an on state and an off state. A pair
15 of read electrodes detect whether the active region is in the on state or in the off state to read the information from the memory cell.

In accordance with another aspect of the invention, a memory device includes a memory cell array composed of multiple memory cells arranged in row and column directions. Each memory cell comprises an active region including a
20 molecular system and ionic complexes distributed in the molecular system, first and second write electrodes for applying an electric field to the active region, to write information to the memory cell, and first and second read electrodes for detecting electrical conductivity of the active region, to read the information from the memory cell.

25 In accordance with another aspect of the invention, a memory cell in a memory device including a memory cell array composed of multiple memory cells arranged in row and column directions, comprises first and second barrier elements arranged in contact with the active region to reduce leakage current.

In accordance with an embodiment of the invention, the first barrier element may be made of material having a work function different from a work function of the second barrier element. For example, the first and second barrier elements may be made of different metals.

5 Different materials having different work functions may be used for the read electrodes, causing the resistance of a memory cell to be substantially different in a forward biased and reverse biased readout configuration. The write operation, on the other hand, is unaffected by the difference in the work function of the readout electrodes.

10 Further features and advantages of the present invention will be apparent from the following description of preferred embodiments.

Brief Description of the Drawings

The following figures depict certain illustrative embodiments of the invention. These depicted embodiments are to be understood as illustrative of the
15 invention and not as limiting in any way.

Figs. 1a-1d show a simplified structure of a molecular composite memory cell in various operational states;

Fig. 2 shows an exemplary four-terminal device in an on state according to an embodiment of the present invention;

20 Fig. 3 shows an array of memory cells, with an exemplary leakage current path indicated; and

Fig. 4 shows a schematic band diagram of a composite material with two different work function contact metals according to an embodiment of the present invention.

25 Detailed Description of Certain Illustrated Embodiments

The present invention addresses and solves problems related to providing a novel memory device. The present invention overcomes these problems in part,

by the provision of write and read electrodes adjacent an active region made of a molecular ensemble that exhibits a reproducible switching and memory effect applicable in macroscopic devices. The material of the active region is a composite material system that exhibits structural electronic instability in one dimension and enables static and dynamic control over the conductivity of such molecular systems. The mechanism for the memory and switching effect of these cells appears to be related to the structural electronic instability of one-dimensional molecular systems and associated with the dissociation of molecules and/or displacement of atoms in an external electrical field.

10 The development of molecular electronics stimulated the more detailed research of electrophysical characteristics of thin molecular films which offer new physical effects that may result in new technologies for electrical switching and memory applications. Although first reported in the 1960's, a generally accepted interpretation of such phenomena is still lacking. This is partly due to the non-reproducibility of the results, even when using identical compounds.

A number of different materials may be used as the molecular composite material. Exemplary materials are described below, but are also discussed in an article by Yu H. Krieger, entitled, "Structural Instability of One-Dimensional Systems As A Physical Principle Underlying The Functioning of Molecular Electronic Devices", Journal of Structural Chemistry, Vol. 40, No. 4, 1999 (Yu H. Krieger), expressly incorporated by reference herein.

Many molecular memory cells can be made of a one-dimensional conductive molecular systems exhibiting structural instability. (Peierls-effect). These tend to have an S-shaped (reentrant) voltage-current characteristic with memory. The impedance of such memory cells can be between ~10 M Ω and ~100 Ω , depending on the switching condition.

There are two predominant types of structural organization of such systems. First, these are strands of linear conjugated polymers, which are weakly

bonded to each other and whose mutual arrangement is generally poorly organized. Second, these are crystal structures, where the individual molecules form one-dimensional columns and interact with each other much more actively than molecules from different columns do. Recently, molecular systems of both
5 types were synthesized.

Polyconjugated systems primarily involve polyvinylenes, i.e., polymers with an acyclic conjugation system, in which the one-dimensional character of structure is dictated by the mechanism of conjugation in linear macromolecules. Polyacetylene is a classical representative of this class of polymers. Its electronic
10 structure is a prototype for many other conjugated polymers.

Another wide class of molecular compounds formed from aromatic and heterocyclic molecules which possess high electric conductivity due to π -bonds between molecules. Such molecular systems are called π -complexes or charge transfer complexes, with those systems whose structure involves isolated one-
15 dimensional columns or strands possessing pronounced electro-physical properties of interest for switching and memory applications. Molecular charge transfer complexes are donor-acceptor systems formed from two molecules: one possessing donor and another acceptor properties. Among the well-defined complexes with a one-dimensional structure, tetra-cyano-quinodimethane
20 (TCNQ) are planar molecules with unsaturated bonds, arranged in a crystal as parallel stacks forming a quasi-one-dimensional system.

In another class of one-dimensional systems, the cations are dynamically disordered. It involves molecular compounds having the general formula $(\text{TMTSF})_2\text{X}$. Transition metal salts of $\text{K}_2 \text{Pt}(\text{CN})_4 \text{Br}_{0.3} \times 3\text{H}_2\text{O}$ (KCP) type are
25 also the typical representatives of mixed-valence quasi-one-dimensional complexes, as are phthalocyanines and porphyrins. Moreover, pure inorganic compounds, such as NbSe_3 , are also interesting examples of compounds with quasi-one-dimensional structure.

An exemplary molecular composite that forms part of a simplified molecular memory cell (MC) is shown in Figs. 1a – 1d. The molecular composite includes a quasi-one-dimensional - or at least structurally and electrically anisotropic - molecular matrix, wherein ionic complexes are distributed in the matrix. Polyconjugated compounds, such as the exemplary quasi-one-dimensional systems described above, for example, polyphenylacetylene, can be used as the anisotropic molecular matrix. The ionic complex can be a salt, such as sodium chloride (NaCl), cesium chloride (CsCl), or any other material that can dissociate in an applied electric field. The exemplary anisotropic molecular matrix is depicted in Figs. 1a-1d as consisting of an assembly of chain-like molecules oriented perpendicular to the electrode surfaces. However, other orientations of those molecules or of anisotropic “channels” are possible as long as a charge separation of the type depicted in Figs. 1 a-1d is enabled.

While not being bound by theory, the following is currently believed by the inventors to describe the mechanism for the conductivity change of the molecular composite material. Electric switching in the molecular thin films depicted in Figs. 1a-1d is characterized by the existence of two stable states, a high impedance state (off state) and a low impedance state (on state). The impedance of this off state is usually more than $\sim 10\text{ M}\Omega$. Switching from the off state to the on state occurs when an applied electric field exceeds a threshold value. The impedance of this on state is less than $\sim 100\ \Omega$. A transition from on state back to the off state takes place when the polarity of the electric field is reversed.

Two modes of the memory cell operation can be identified: the metastable mode (Fig.1b) and stable mode (Fig.1c). The stable mode of the memory cell operation may be characterized by a high threshold voltage level for switching between the off state and the on state (in the range of about 3-10V), low impedance of the on state (less than $100\ \Omega$), long switching time (1 ms and more)

and long storage time (more than two month). Some memory cells exhibit substantially unchanged electrical properties after storage for six years.

Conversely, the metastable mode of the memory cell function is characterized by a low threshold voltage level for switching between the off state and the on state (in the range of about 0.1-0.5V), high impedance of the on state (wide region, about $1\text{k}\Omega$ - $1\text{M}\Omega$), short switching time (less than $1\mu\text{s}$), and short storage time (between about 10s and several hours).

Fig. 1a illustrates the off state, where the electrical conductivity is essentially zero, assuming that the anisotropic molecular matrix itself is a good electrical insulator. When an external electric field E is applied, as indicated in Fig. 1b, the sodium salt dissociates into sodium and chlorine ions, and the ions are displaced from their original position in the anisotropic molecular matrix, resulting in an increase in the electrical conductivity of the MC (on state) to the metastable state. Upon further increase of the electric field, the ions become more strongly separated (Fig. 1c), accompanied by a still further increase in the conductivity of the MC, which attains the above-described stable state. When a very large field is applied over a long time, the anions and cations accumulate at the electrodes (Fig. 1d), resulting in a sharp decrease in the electrical conductivity of the MC due to the absence of mobile charges ("off" state).

Referring now to Fig. 2, a four-terminal memory cell 20 according to an embodiment of the present invention includes an upper write electrode A, an upper read electrode B insulated from the upper write electrode A by an insulator 1, a lower read electrode C, a lower write electrode D, an insulator 2 disposed of between the lower read electrode C and the lower write electrode D for insulation purposes, and an active layer 22 made of composite material described above with reference to Fig. 1. For example, the active layer 22 may be provided in contact with each of the lower and upper read electrodes B and C.

When an electric field is applied between the write electrodes A and D, the ionic NaCl complex dissociates into Na^+ and Cl^- ions. If the potential at the electrode A is positive with respect to the potential at the electrode D, the negatively charged Cl^- ions migrate towards the positive write electrode A, 5 whereas the positively charged Na^+ ions migrate towards the negative write electrode D. For example, to provide a writing operation, the write electrode A may be grounded, whereas a negative potential, e.g. -10 V, may be applied to the electrode D.

The read electrodes B and C as well as the insulators 1 and 2 prevent the ions 10 from actually reaching the write electrodes A and B, which only provide the electric field. As a result, as discussed above with reference to Fig. 1, the electrical conductivity of the composite material layer 22 increases so that electric current can pass between the read electrode B and the read electrode C. This state corresponds to the on state of the device 40.

15 An erasing operation may be provided by applying between the write electrode A and the write electrode D an electric field having polarity opposite with respect to the polarity of the electric field applied to provide the writing operation. During the erasing operation, the device 40 is switched from its conducting state (on state) to its non-conducting state ("off" state). For example, 20 to provide the erasing operation, the write electrode A may be grounded, whereas a positive potential, e.g. +10 V, may be supplied to the write electrode D.

A reading operation may be provided by measuring the impedance of the active layer 22 between the read electrodes B and C. To support the reading operation, the electrode B may be grounded, and a small negative potential, e.g. 25 -0.1 V may be supplied to the electrode C.

The device 20 may be a four-terminal memory cell of a memory device including a memory cell array composed of multiple memory cells arranged in row and column directions, wherein the electrodes A and B can form, for

example, the row electrodes of the memory cell array, and the electrodes C and D can form the column electrodes of the memory cell array.

Fig. 3 schematically illustrates the memory cell array of the present invention. When a particular memory cell of the memory cell array located, for example in the fifth row (R5) and the second column (C2) is read out, then a leakage current can also flow by a large number of cells. Fig. 3 illustrates an exemplary path for the leakage current via cells arranged at nodes [R5,C4], [R3,C4], and [R3,C2] of the memory cell array, where R and C respectively identify the row and column addresses of a particular node. Since many such paths are available, only a small cell resistance in the reverse direction can make it impossible to reliably read out the information stored, for example, in the cell arranged at node [R5,C2].

Referring to Fig. 4, the cell resistance can be increased substantially in the reverse direction by providing contacts to the composite layer 22 using barrier elements 42 and 44 made of different materials, such as Metal I and Metal II with different work functions WI and WII, respectively. The conduction band and valence band quasi-Fermi levels of the composite material are indicated in Fig. 4. It is clearly seen that electronic carriers, e.g., electrons, passing through the active layer 22 from Metal II into Metal I have to overcome a substantially larger potential barrier than electrons moving in the opposite direction. Suitable metals for a low work function Metal I are, for example, Al, Mg, Ag and In, whereas suitable metals or materials for a high work function Metal II are, for example, Au and Indium-Tin-Oxide (ITO). It is therefore possible to design memory cells with low leakage currents using the composite material disclosed herein.

The barrier elements 42 and 44 made of different materials having different work functions may be used as read electrodes for reading information from a memory cell by detecting impedance of the active layer 22 between the elements 42 and 44. The barrier elements having different work functions cause the impedance of the memory cell to be substantially different in a forward biased

and reverse biased readout configuration. The writing operation, on the other hand, is unaffected by the difference in the work function of the readout electrodes.

While the invention has been disclosed in connection with the preferred
5 embodiments shown and described in detail, various modifications and
improvements thereon will become readily apparent to those skilled in the art.

What is Claimed Is:

1. A memory cell comprising:
an active region including a molecular system,
at least one write electrode for applying an electric field to the
active region to write information to the active region, and
5 at least one read electrode for reading the information from the
active region.
2. The memory cell of claim 1, wherein the active region further
includes ionic complexes distributed in the molecular system.
3. The memory cell of claim 2, wherein the active region has a low-
impedance state and a high-impedance state.
4. The memory cell of claim 3, wherein the active region is
responsive to the applied electric field by switching from the high-impedance
state to the low-impedance state to write the information.
5. The memory cell of claim 4, wherein impedance of the active
region is detected to read the information.
6. The memory cell of claim 5, wherein the active region is
configured to switch to the low-impedance state when intensity of the applied
electric field of a first polarity exceeds a threshold value.
7. The memory cell of claim 6, wherein the active region is
configured to return to the high-impedance state when an electric field of a second
polarity opposite with respect to the first polarity is applied to the active region.
8. The memory cell of claim 7, wherein the writing electrode is
arranged for providing the electric field of the second polarity.

9. The memory cell of claim 2, wherein the read electrode is provided in contact with the active region.

10. The memory cell of claim 9, further comprising an insulator provided between the read electrode and the write electrode.

11. The memory cell of claim 2, wherein an ionic complex includes ions of Na and Cl.

12. The memory cell of claim 2, wherein an ionic complex includes ions of Cs and Cl.

13. The memory cell of claim 2, wherein the molecular system includes a quasi-one-dimensional molecular matrix.

14. The memory cell of claim 2, wherein the molecular system includes a structurally and electrically anisotropic molecular matrix.

15. The memory cell of claim 2, wherein the molecular system includes a polyconjugated compound.

16. The memory cell of claim 2, wherein the molecular system includes aromatic molecules.

17. The memory cell of claim 2, wherein the molecular system includes heterocyclic molecules.

18. The memory cell of claim 2, wherein the molecular system includes porphyrin.

19. The memory cell of claim 2, wherein the molecular system includes phthalocyanines.

20. The memory cell of claim 2, wherein the molecular system includes anisotropic inorganic material.

21. The memory cell of claim 2, further comprising first and second barrier elements arranged in contact with the active region to reduce leakage current.

22. The memory cell of claim 21, wherein the first barrier element is made of material having a first work function, and the second barrier element is made of material having a second work function different from the first work function.

23. The memory cell of claim 22, wherein the first and second barrier elements are made of different metals.

24. A memory cell comprising:

first and second write electrodes for writing information to the memory cell,

an active region including a molecular system, and responsive to an electric field applied between the first and second write electrodes for switching between an on state and an off state, and

first and second read electrodes for detecting whether the active region is in the on state or in the off state to read the information from the memory cell.

25. The memory cell of claim 24, wherein the active region further comprises ionic complexes distributed in the molecular system.

26. The memory cell of claim 25, wherein the active region is configured to have a low impedance in the on state and a high impedance in the off state.

27. The memory cell of claim 26, wherein the active region is responsive to the applied electric field of a first polarity by switching from the off state to the on state to provide writing the information.

28. The memory cell of claim 27, wherein the active region is responsive to an electric field of a second polarity applied between the first and second write electrodes by switching from the on state to the off state, to provide erasing the written information, the second polarity is opposite with respect to the
5 first polarity.

29. The memory cell of claim 25, wherein the active region is provided in electrical contact with the first and second read electrodes.

30. The memory cell of claim 29, further comprising a first insulating layer provided between the first read electrode and the first write electrode.

31. The memory cell of claim 30, further comprising a second insulating layer provided between the second read electrode and the second write electrode.

32. A method of storing information using a storage device having an active region including a molecular system and ionic complexes distributed in the molecular system, the method comprising the steps of:

5 applying an electric field of a first polarity between a first pair of electrodes surrounding the active region, to write information into the storage device, and

detecting electrical conductivity of the active region using a second pair of electrodes surrounding the active region, to read the information from the storage device.

33. The method of claim 32, further comprising the step of applying an electric field of a second polarity between the first pair of electrodes, to erase the information written to the storage device, the second polarity is opposite with respect to the first polarity.

34. A memory device including a memory cell array composed of multiple memory cells arranged in row and column directions, each memory cell comprising:

an active region including a molecular system and ionic complexes
5 distributed in the molecular system,

first and second write electrodes for applying an electric field to the active region, to write information to the memory cell, and

first and second read electrodes for detecting electrical conductivity of the active region, to read the information from the memory cell.

35. The memory device of claim 34, wherein the active region further comprises ionic complexes distributed in the molecular system.

36. The memory device of claim 35, wherein the first write electrode and the first read electrode are row electrodes of the memory cell array.

37. The memory device of claim 36, wherein the second write electrode and the second read electrode are column electrodes of the memory cell array.

38. The memory device of claim 37, further comprising a first insulating layer between the first write electrode and the first read electrode, and a second insulating layer between the second write electrode and the second read electrode.

39. The memory device of claim 38, wherein the first and second read electrodes are provided in contact with the active region.

40. The memory device of claim 35, wherein the first and second read electrodes are arranged in contact with the active region to reduce leakage current.

41. The memory device of claim 40, wherein the first read electrode is made of material having a first work function, and the second read electrode is made of material having a second work function different from the first work function.

42. The memory device of claim 41, wherein the first and second read electrodes are made of different metals.

43. A memory device including a memory cell array composed of multiple memory cells arranged in row and column directions, each memory cell comprising:

an active region including a molecular system, and
5 first and second barrier elements arranged in contact with the active region to reduce leakage current.

44. The memory device of claim 43, wherein the active region further comprises ionic complexes distributed in the molecular system.

45. The memory device of claim 43, wherein the first barrier element is made of material having a first work function, and the second barrier element is made of material having a second work function different from the first work function.

46. The memory device of claim 45, wherein the first and second barrier elements are made of different metals.

47. The memory device of claim 45, wherein the material of the first barrier element is selected from the group consisting of Al, Mg, Ag, and In.

48. The memory device of claim 47, wherein the material of the second barrier element is selected from the group consisting of Au and Indium-Tin-Oxide.

49. The memory device of claim 43, wherein the first and second barrier elements are read electrodes for reading information from the memory cell by detecting impedance of the active region between the read electrodes.

1/3

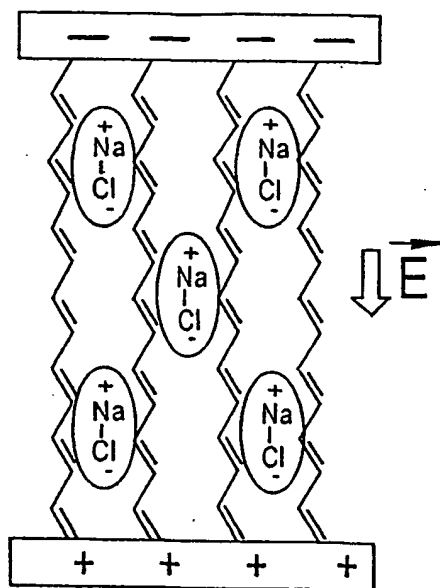


FIG. 1(a)

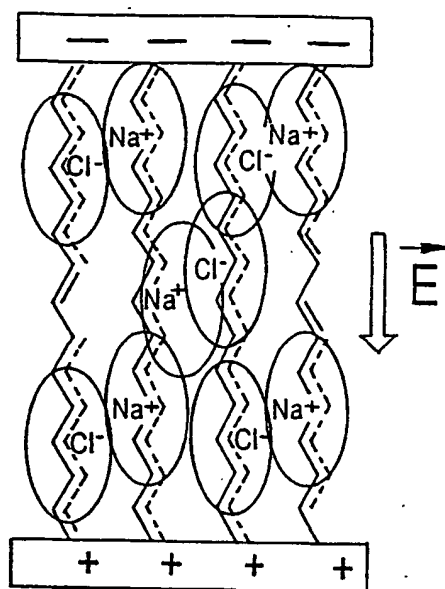


FIG. 1(b)

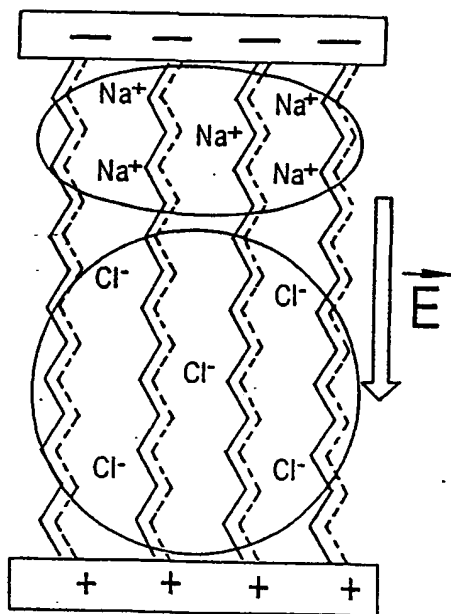


FIG. 1(c)

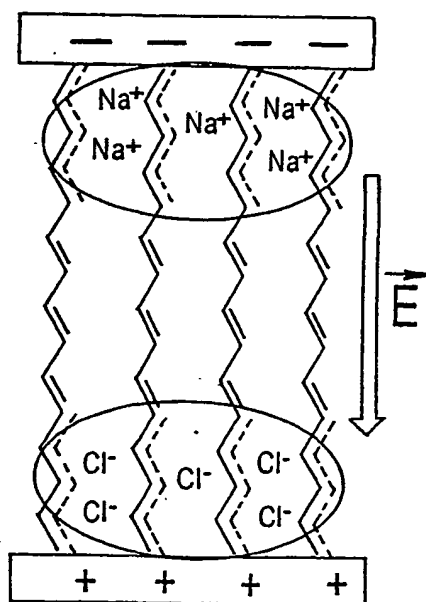


FIG. 1(d)

2/3

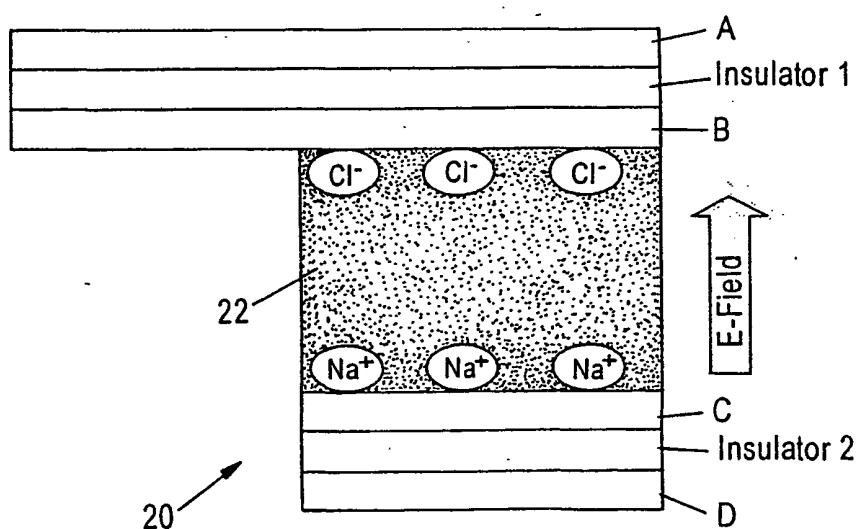


FIG. 2

3/3

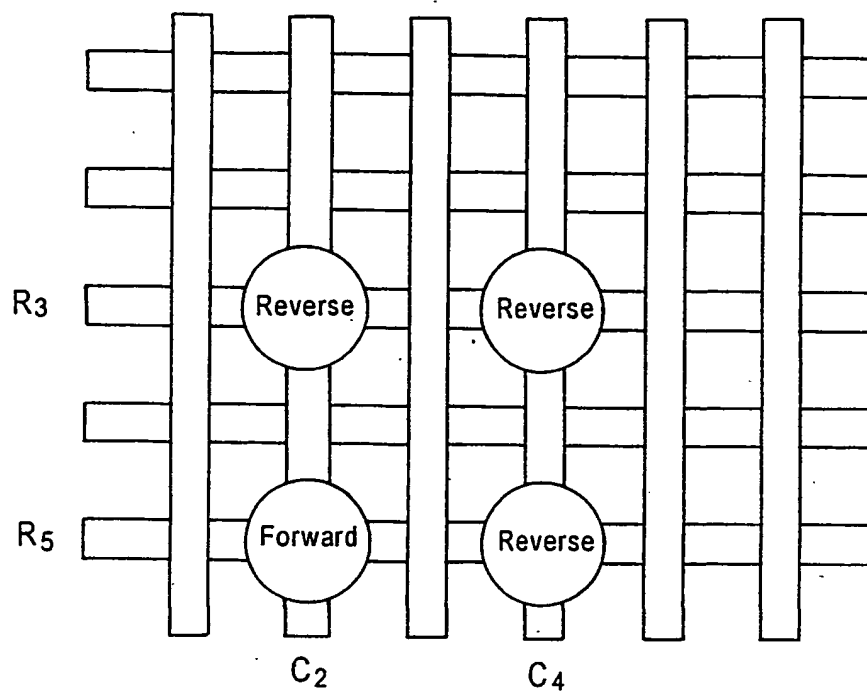


FIG. 3

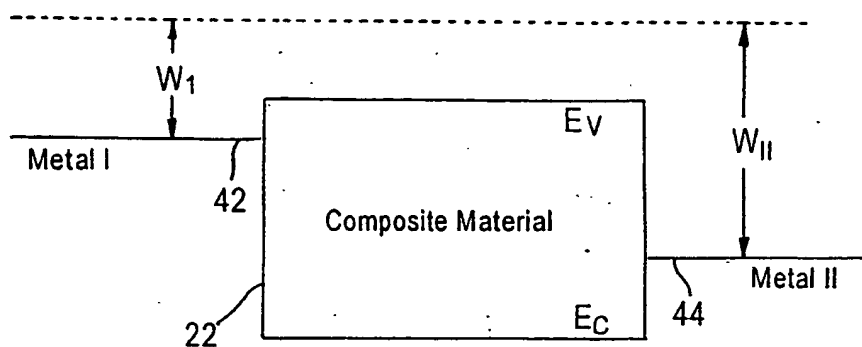


FIG. 4

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 November 2002 (14.11.2002)

PCT

(10) International Publication Number
WO 02/091495 A3

(51) International Patent Classification⁷: H01L 51/20,
27/00, G11C 13/02

MANDELL, Aaron; 140 Marlborough Street, Apt. 3,
Boston, MA 02116 (US). PERLMAN, Andrew; 310
Marlborough Street, Boston, MA 02116 (US).

(21) International Application Number: PCT/US02/14269

(22) International Filing Date: 7 May 2002 (07.05.2002)

(74) Agent: YAMPOLSKY, Alexander, V.; McDermott, Will
& Emery, 600 13th Street, N.W., Washington, DC 20005-
3096 (US).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/289,056 7 May 2001 (07.05.2001) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN,
YU, ZA, ZM, ZW.

(71) Applicant: COATUE CORPORATION [US/US]; 25
Olympia Avenue, Suite B, Woburn, MA 01801 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: MOLECULAR MEMORY DEVICE




FIG. 1(a)




FIG. 1(b)




FIG. 1(c)




FIG. 1(d)

(57) Abstract: A novel memory cell is provided with an active region including a molecular system and ionic complexes distributed in the molecular system. A pair of write electrodes are arranged for writing information to the memory cell. The active region is responsive to an electric field applied between the pair of write electrodes for switching between an on state and an off state. The active region has a high impedance in the off and a low impedance in the on state. A pair of read electrodes is used to detect whether the active region is in the on state or in the off state to read the information from the memory cell. Read electrodes may be made of different materials having different work functions to reduce leakage current.

WO 02/091495 A3



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

(88) Date of publication of the international search report:
21 August 2003

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/14269

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01L51/20 H01L27/00 G11C13/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01L G11C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JURI H KRIEGER ET AL: "Molecular Analogue Memory Cell" FORESIGHT CONFERENCE ON MOLECULAR NANOTECHNOLOGY, XX, XX, 12 November 1998 (1998-11-12), pages 1-9, XP002209014 page 1 page 2; figures 1,2 page 8 -page 9	1-49
X	US 4 652 894 A (POEHLER JR THEODORE O ET AL) 24 March 1987 (1987-03-24) figures 1,3 column 3, line 20 -column 4, line 35 column 7; claims -/--	1-49

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

27 March 2003

Date of mailing of the international search report

04/04/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Paisdor, B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/14269

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 034 192 A (KITTESEN GREGG P ET AL) 23 July 1991 (1991-07-23) column 4, line 59 - line 68 column 10; example 1 column 12 -column 14; example 4 column 6, line 62 - line 68	1-49
X	EP 0 727 822 A (CANON KK) 21 August 1996 (1996-08-21) abstract; claim 1 figure 8	1,24,32, 34,43
X	EP 0 268 370 A (CANON KK) 25 May 1988 (1988-05-25) abstract; claims 1,4 figures 1,7 examples 1,2,5 page 2, line 36 - line 45 page 3, line 45 - line 48	1,24,32, 34,43
X	WO 99 04440 A (BEN JOSEPH GDALYAHU ;TECHNION RES & DEV FOUNDATION (IL); EICHEN YO) 28 January 1999 (1999-01-28) abstract; claims figures 4-1,4-2 page 44 -page 46; example 9	1,24,32, 34,43
X	KRIEGER Y H: "STRUCTURAL INSTABILITY OF ONE-DIMENSIONAL SYSTEMS AS A PHYSICAL PRINCIPLE UNDERLYING THE FUNCTIONING OF MOLECULAR ELECTRONIC DEVICES" JOURNAL OF STRUCTURAL CHEMISTRY, PLENUM PRESS, NEW YORK, NY, US, vol. 40, no. 4, 1999, pages 594-619, XP008005141 ISSN: 0022-4766 cited in the application page 610, paragraph 2.2.4 -page 611 page 603, paragraph 2.1.1. -page 604	1,24,32, 34,43
P,X	REED M A ET AL: "MOLECULAR RANDOM ACCESS MEMORY CELL" APPLIED PHYSICS LETTERS, AMERICAN INSTITUTE OF PHYSICS. NEW YORK, US, vol. 78, no. 23, 4 June 2001 (2001-06-04), pages 3735-3737, XP001073300 ISSN: 0003-6951 the whole document	1,24,32, 34,43
E	WO 02 091385 A (COATUE CORP) 14 November 2002 (2002-11-14) the whole document	1-49

-/--

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/14269

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	WO 02 091494 A (COATUE CORP) 14 November 2002 (2002-11-14) the whole document -----	1-49
E	WO 02 091496 A (COATUE CORP) 14 November 2002 (2002-11-14) the whole document -----	1-49

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/14269

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4652894	A	24-03-1987	US 4371883 A US 4507672 A	01-02-1983 26-03-1985
US 5034192	A	23-07-1991	US 4895705 A US 4721601 A AU 605057 B2 AU 4787990 A AU 589920 B2 AU 5030685 A CA 1243419 A1 CA 1260159 A2 DE 3588098 D1 EP 0185941 A2 JP 2073456 C JP 7095052 B JP 62011159 A US 4936956 A US 4929313 A US 4717673 A	23-01-1990 26-01-1988 03-01-1991 10-05-1990 26-10-1989 05-06-1986 18-10-1988 26-09-1989 15-05-1996 02-07-1986 25-07-1996 11-10-1995 20-01-1987 26-06-1990 29-05-1990 05-01-1988
EP 0727822	A	21-08-1996	JP 8222648 A DE 69603632 D1 DE 69603632 T2 EP 0727822 A2 KR 234502 B1 US 5942779 A	30-08-1996 16-09-1999 06-04-2000 21-08-1996 15-12-1999 24-08-1999
EP 0268370	A	25-05-1988	JP 63296273 A JP 2039045 C JP 7077272 B JP 63096956 A JP 2010983 C JP 7048575 B JP 63160389 A DE 3751376 D1 DE 3751376 T2 EP 0268370 A2 US 5359204 A	02-12-1988 28-03-1996 16-08-1995 27-04-1988 02-02-1996 24-05-1995 04-07-1988 03-08-1995 16-11-1995 25-05-1988 25-10-1994
WO 9904440	A	28-01-1999	IL 121312 A AU 749432 B2 AU 8239798 A CN 1264498 T EP 0998759 A1 WO 9904440 A1 JP 2001510922 T US 2002171079 A1	13-09-2001 27-06-2002 10-02-1999 23-08-2000 10-05-2000 28-01-1999 07-08-2001 21-11-2002
WO 02091385	A	14-11-2002	WO 02091385 A1 US 2002163831 A1	14-11-2002 07-11-2002
WO 02091494	A	14-11-2002	WO 02091494 A1 US 2002163829 A1	14-11-2002 07-11-2002
WO 02091496	A	14-11-2002	WO 02091496 A2 US 2002163057 A1	14-11-2002 07-11-2002

Form PCT/ISA/210 (patent family annex) (July 1992)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)